

Pedestrian stacker truck 1.2 - 1.4 ton



BT staxio

W-series

SWE120

SWE140



Pedestrian stacker

Specification for stacker trucks						SWE120	SWE140
Identification	1.1	Manufacturer				Toyota	Toyota
	1.2	Model				SWE120	SWE140
	1.3	Drive				Electric	Electric
	1.4	Operator type				Pedestrian	Pedestrian
	1.5	Load capacity/rated load	Q	kg		1200	1400
	1.6	Load centre	c	mm		600	600
	1.8	Load distance, centre of support arm wheel to face of forks	x	mm		645	645
	1.9	Wheelbase	y	mm		1252	1252
Weight	2.1	Service weight including battery		kg		907	907
	2.2	Axle load, with load, drive/castor/support arm wheel		kg		400/290/1445	450/245/1640
	2.3	Axle load, without load, drive/castor/support arm wheel		kg		400/250/285	450/200/285
Wheels	3.1	Drive/castor/fork wheel				Polyurethane	Polyurethane
	3.2	Wheel size, front		mm		Ø230x70	Ø230x70
	3.3	Wheel size, rear		mm		Ø85x95	Ø85x95
	3.4	Additional wheels (dimensions)		mm		Ø125x50	Ø125x50
	3.5	Wheels, number front/rear (x = driven wheels)				1x+2/2	1x+2/2
	3.6	Track width, front	b ₁₀	mm		550	550
	3.7	Track width, rear	b ₁₁	mm		390	390
Dimensions	4.2	Height, mast lowered	h ₁	mm		2143 *)	2168 *)
	4.3	Free lift	h ₂	mm		76 *)	76 *)
	4.4	Lift	h ₃	mm		3210 *)	3165 *)
		Lift height	h ₂₃	mm		3300 *)	3255 *)
	4.5	Height, mast extended	h ₄	mm		3720 *)	3725 *)
	4.8	Stand height (optional platform)	h ₇	mm		150	150
	4.9	Height of tiller in drive position without platform, min./max.	h ₁₄	mm		865/1235	865/1235
		Height of tiller in drive position with platform, min./max.	h ₁₄	mm		1055/1235	1055/1235
	4.15	Height, fork lowered	h ₁₃	mm		90	90
	4.19	Overall length	l ₁	mm		1906	1906
	4.20	Length to face of forks	l ₂	mm		756	756
	4.21	Overall width	b ₁	mm		770	770 *)
	4.22	Fork dimensions	s/e/l	mm		60/180/1150 *)	70/180/1150 *)
	4.24	Fork-carriage width	b ₃	mm		674	674
	4.25	Width over forks	b ₅	mm		570 *)	570 *)
	4.31	Ground clearance, with load, below mast	m ₁	mm		27	27
	4.32	Ground clearance, centre of wheelbase	m ₂	mm		27	27
	4.34.1	Aisle width for pallets 1000x1200 crossways	A _{st}	mm		2300	2300
	4.34.2	Aisle width for pallets 800x1200 lengthways	A _{st}	mm		2287	2287
	4.35	Turning radius	W _a	mm		1403	1403
Performance data	5.1	Travel speed, with/without load		km/h		6/6	6/6
	5.2	Lift speed, with/without load		m/s		0.12/0.28	0.11/0.28
	5.3	Lowering speed, with/without load		m/s		0.38/0.38	0.37/0.38
	5.8	Max. gradeability, with/without load		%		8/12 ¹⁾	8/12 ¹⁾
	5.10	Service brake				Electromagnetic	Electromagnetic
Electric motor	6.1	Drive motor rating S2 60 min		kW		1.0	1.5
	6.2	Lift motor rating at S3 15%		kW		2.2 ²⁾	2.2 ²⁾
	6.4	Battery voltage/nominal capacity K _s		V/Ah		24/225 *)	24/225 *)
	6.5	Battery weight		kg		192 ¹⁾	192 ¹⁾
	6.6	Energy consumption according to VDI cycle		kWh/h		0,79	0,94
		Energy consumption acc. to EN16796		kWh/h		0,6	0,71
	6.7	Turnover output		t/h		52,8	61,9
	6.8	Energy consumption at turnover output		kWh/h		1,07	1,39
Others	8.1	Type of drive control				Variable AC	Variable AC
	10.7	Sound level at the driver's ear according to EN12053		dB(A)		61	61

¹⁾ Measured according to company standard

²⁾ S3 6%

*) Further alternatives are available and will produce other values.

Data is based on standard configurations: Medium battery compartment, h₂₃ = 3300 mm (SWE120) and 3255 mm (SWE140) Duplex Tele Panoramic View mast.

All data are based on table configuration. Other configurations may give other values.

Truck performance and dimensions are nominal and subject to tolerances.

Toyota Material Handling Manufacturing Sweden AB products and specifications are subject to change without notice.

Battery dependent dimensions


BT staxio

Dimensions		Battery change		SWE120			SWE140		
				Lift out		Sideways	Lift out		Sideways
		Battery compartment		Medium	Large	Large	Medium	Large	Large
1.9	Wheelbase	y	mm	1252	1302	1302	1252	1302	1302
4.19	Overall length	l ₁	mm	1906	1956	1956	1906	1956	1956
	without platform		mm	1991/2381	2041/2431	2041/2431	1991/2381	2041/2431	2041/2431
4.20	Length to face of forks	l ₂	mm	756	806	806	756	806	806
	without platform		mm	841/1231	891/1281	891/1281	841/1231	891/1281	891/1281
4.34.1	Aisle width for pallets 1000x1200 crossways	A _{st}	mm	2300	2350	2350	2300	2350	2350
	without platform		mm	2385/2785	2435/2835	2435/2835	2385/2785	2435/2835	2435/2835
4.34.2	Aisle width for pallets 800x1200 lengthways	A _{st}	mm	2287	2337	2337	2287	2337	2337
	without platform		mm	2372/2772	2422/2822	2422/2822	2372/2772	2422/2822	2422/2822
4.35	Turning radius, forks raised	W _a	mm	1403	1453	1453	1403	1453	1453
	without platform		mm	1488/1888	1538/1938	1538/1938	1488/1888	1538/1938	1538/1938
6.4	Battery voltage, nominal capacity, Lead-Acid	K _s	V/Ah	24/225	24/300	24/260	24/225	24/300	24/260
	Battery voltage, nominal capacity, Li-Ion	K _s	V/Ah	24/105	24/210	-	24/105	24/210	-
6.5	Battery weight, nominal		kg	192	248	221	192	248	221
	Battery weight, min.—max.		kg	185 - 285	185 - 285	185 - 285	185 - 285	185 - 285	185 - 285

Mast dimensions

SWE120			Simplex	Duplex Tele					Dupl. Tele Panoram. View					Duplex Hi-Lo					Triplex Hi-Lo				
h ₂₃	Lift height (h ₁₃ +h ₃)	mm	1400 1700	2700	2900	3300	3700	4150	2700	2900	3300	3700	4150	2700	2900	3300	3700	4150	3300	3700	4150	4500	
h ₃	Lift	mm	1310 1610	2610	2810	3210	3610	4060	2610	2810	3210	3610	4060	2610	2810	3210	3610	4060	3210	3610	4060	4410	
h ₁	Height, mast lowered	mm	1825 2125	1843	1943	2143	2343	2568	1843	1943	2143	2343	2568	1843	1943	2143	2343	2568	1720	1854	2004	2120	
h ₂	Free lift, ground to top of forks	mm	1400 1700	76	76	76	76	76	76	76	76	76	76	1330	1430	1630	1830	2054	1180	1314	1464	1580	
h ₄	Height, mast extended	mm	1825 2125	3125	3325	3725	4125	4575	3120	3320	3720	4120	4570	3141	3341	3741	4141	4591	3747	4149	4599	4947	

SWE140			Duplex Tele Panoramic View					Duplex Hi-Lo					Triplex Hi-Lo				
h ₂₃	Lift height (h ₁₃ +h ₃)	mm	2655	2855	3255	3655	4105	2655	2855	3255	3655	4105	3255	3655	4105	4455	4755
h ₃	Lift	mm	2565	2765	3165	3565	4015	2565	2765	3165	3565	4015	3165	3565	4015	4365	4665
h ₁	Height, mast lowered	mm	1868	1968	2168	2368	2593	1843	1943	2143	2343	2568	1720	1854	2004	2120	2220
h ₂	Free lift, ground to top of forks	mm	76	76	76	76	76	1284	1384	1584	1784	2009	1134	1268	1418	1534	1634
h ₄	Height, mast extended	mm	3125	3325	3725	4125	4575	3141	3341	3741	4141	4591	3747	4149	4599	4947	5247

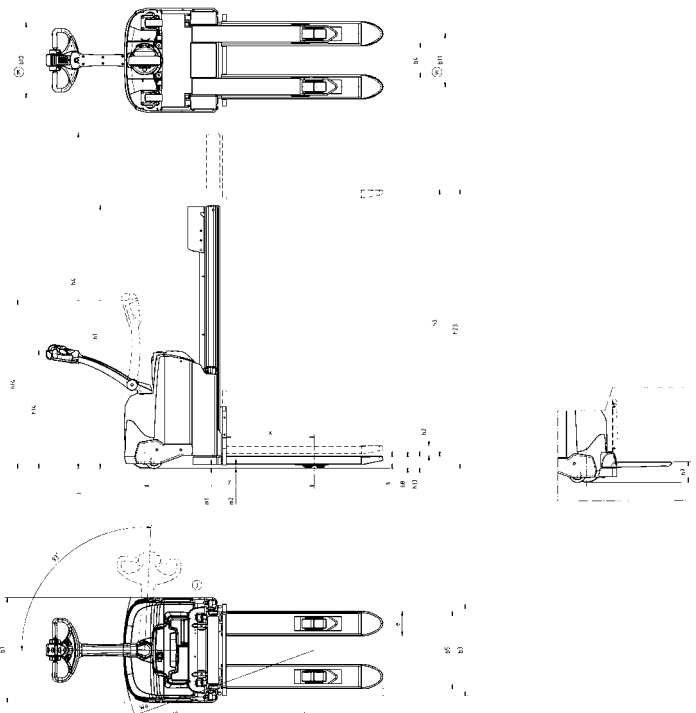

Truck features:

- BT Powerdrive System
- Fingertip controls
- Electronic braking system
- Electronic speed control
- Operator safety
- Storage compartments
- Automatic switch-off
- Click-2-creep
- Programmable performance
- Easy access for maintenance
- Built in charger (option)
- Sensilift (option)
- Flip-up operator platform (option)
- Toyota I_site: truck fleet management system (option)
- Hydraulic oil for low temperatures (option)

